


■ BN54 (Inner Rotor) + Gear Head (Spur Gear)

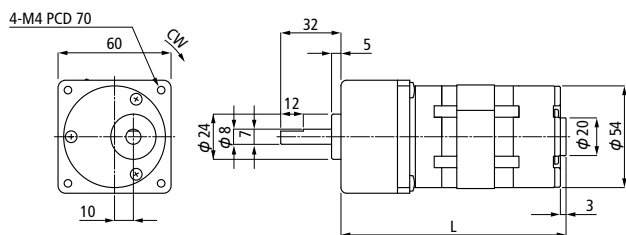

MODEL(Gear Ratio)	Rated Voltage	Rated Torque	Rated Speed	Rated Current	No Load Speed	No Load Current	Permissible Thrust Load	Permissible Torque	Max Instantaneous Permissible Torque	Total Length
	V	mN · m(kgf · cm)	r/min	mA	r/min	mA	Kg	N · m(kgf · cm)	N · m(kgf · cm)	mm
BG54 (1/ 15)	24	490 (5000)	228	900	253	480	3	0.98 (10)	3.92 (40)	120
BG54 (1/ 30)	24	980(10000)	113	1000	127	500	3	1.57 (16)	4.90 (50)	125
BG54 (1/ 60)	24	1960(20000)	56	1100	63	520	3	2.45 (25)	4.90 (50)	132

BG54 : BN54+Gear Head