


## ■ BN22 Series (Inner Rotor)

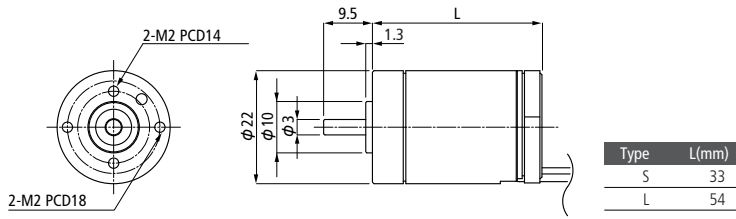

MODEL	Rated Voltage	Rated Power Output	Rated Torque	Rated Speed	Rated Current	No Load Speed	No Load Current	Starting Torque	Torque Constant	Mechanical Time Constant
	V	W	mN · m(gf · cm)	r/min	mA	r/min	mA	mN · m(gf · cm)	mN · m/A(gf · cm/A)	ms
BN22 S	24	7.5	4.9 (50)	15000	500	17000	80	29.4 (300)	11.8 (120)	3.0
BN22 L	24	8.5	7.8 (80)	7000	400	8000	60	39.2 (450)	24.5 (250)	3.5