


■ BN54 Series (Inner Rotor)

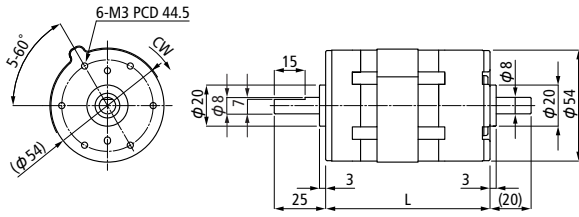

Type	L(mm)
S	63
M	80

MODEL	Rated Voltage V	Rated Power Output W	Rated Torque mN · m (gf · cm)	Rated Speed r/min	Rated Current mA	Torque Constant mN · mA / (gf · cm/A)	Moment of Inertia g · cm ²	Speed Control Range r/min
BN54 S	24	22	49 (500)	4200	1600	35 (360)	110	1000~2500
BN54 M	24	31	98 (1000)	3000	1900	61 (620)	180	1000~2000