

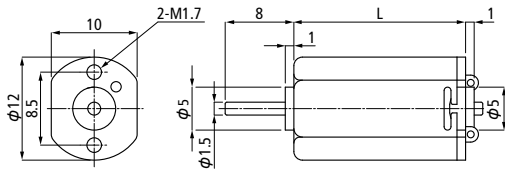


DN12 Series

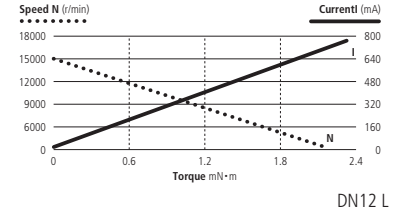

Type	L(mm)
M	20
L	30

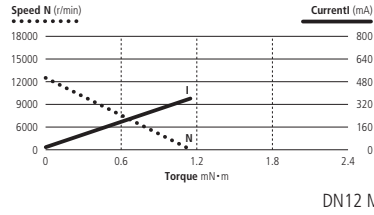

MODEL	Rated Voltage	Rated Power Output	Rated Torque	Rated Speed	Rated Current	No Load Speed	No Load Current	Starting Torque	Torque Constant	Winding Resistance	Winding Inductance	Moment of Inertia	Mechanical Time Constant	Thermal Resistance
	V	W	mN·m(gf·cm)	r/min	mA	r/min	mA	mN·m(gf·cm)	mN·m/(gf·cm/A)	Ω	mH	g·cm ²	ms	°C/W
DN12 M	5	0.28	0.29 (3)	9150	145	12300	55	1.15 (11.7)	3.33 (34.0)	12.50	2.4	0.24	27	90
DN12 L	5	0.89	0.98 (10)	8700	410	15000	75	1.96 (20.0)	2.92 (29.8)	5.75	1.0	0.53	36	80