

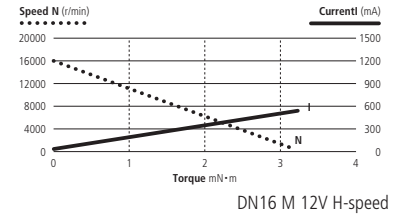
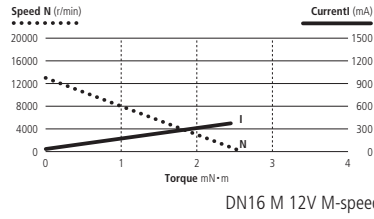
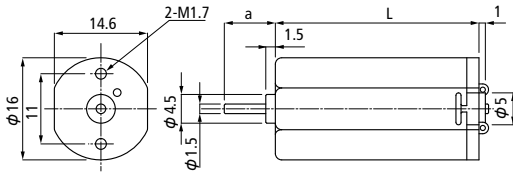
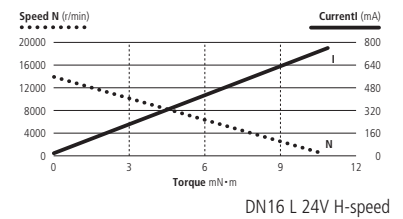
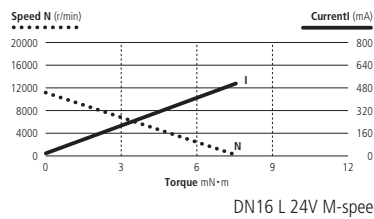


DN16 Series

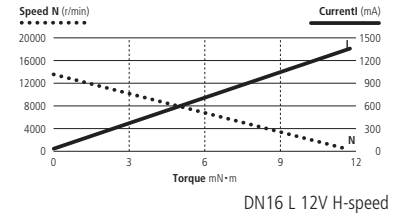

Type	L(mm)	a(mm)
M	20.0	9.4
L	31.9	8

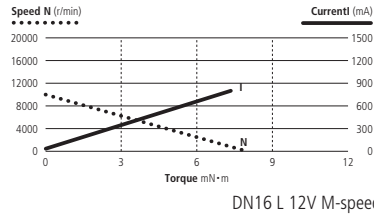

MODEL	Rated Voltage	Rated Power Output	Rated Torque	Rated Speed	Rated Current	No Load Speed	No Load Current	Starting Torque	Torque Constant	Winding Resistance	Winding Inductance	Moment of Inertia	Mechanical Time Constant	Thermal Resistance
	V	W	mN·m(gf·cm)	r/min	mA	r/min	mA	mN·m(gf·cm)	mN·m/A(gf·cm/A)	Ω	mH	g·cm ²	ms	°C/W
DN16 M M-speed	12	0.8	0.98 (10)	8000	170	13000	40	2.55 (26)	7.40 (75)	31.1	8.3	0.67	39	57
DN16 M H-speed	12	1.2	0.98 (10)	11500	230	16000	60	3.24 (33)	5.60 (57)	19.4	4.9	0.67	42	57
DN16 L M-speed	12	1.5	1.96 (20)	7500	230	10000	40	7.85 (80)	10.40 (106)	15.0	4.4	0.80	11	42
	24	1.8	1.96 (20)	8800	140	11500	20	8.24 (84)	17.70 (180)	48.7	14.0	0.80	13	42
DN16 L H-speed	12	2.3	1.96 (20)	11000	300	13500	55	11.80 (120)	7.85 (80)	8.0	2.5	0.80	11	42
	24	2.4	1.96 (20)	11500	160	14000	25	10.80 (110)	14.50 (148)	33.0	9.0	0.80	13	42