

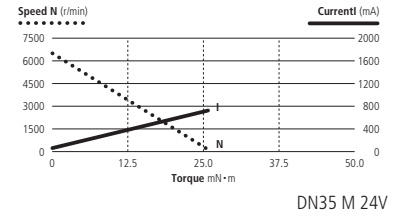
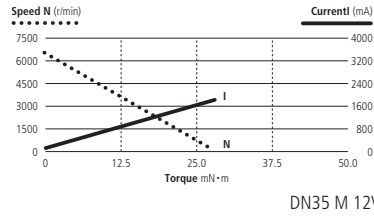
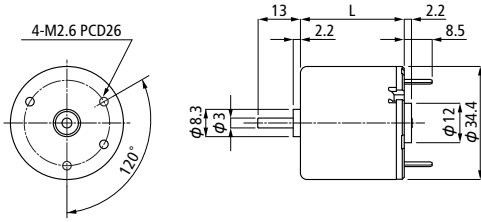


DN35 Series

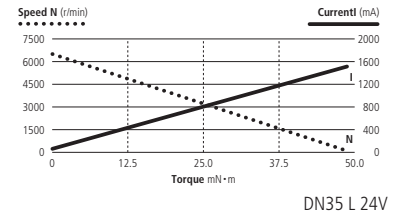

Type	L(mm)
M	31.6
L	38.2

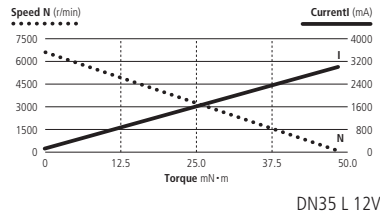

MODEL	Rated Voltage	Rated Power Output	Rated Torque	Rated Speed	Rated Current	No Load Speed	No Load Current	Starting Torque	Torque Constant	Winding Resistance	Winding Inductance	Moment of Inertia	Mechanical Time Constant	Thermal Resistance
	V	W	mN·m(gf·cm)	r/min	mA	r/min	mA	mN·m(gf·cm)	mN·m/A(gf·cm/A)	Ω	mH	g·cm ²	ms	$^{\circ}\text{C/W}$
DN35 M	12	2.3	3.92 (40)	5600	330	6500	90	28.4 (290)	16.0 (163)	6.5	6.7	19	48	27
	24	2.3	3.92 (40)	5500	165	6500	45	25.5 (260)	35.8 (365)	32.0	30.0	19	47	26
DN35 L	12	4.5	7.85 (80)	5500	560	6550	90	49.0 (500)	17.0 (173)	4.2	4.0	33	48	24
	24	4.5	7.85 (80)	5500	300	6500	60	49.0 (500)	33.1 (338)	15.2	17.0	33	46	23