



# ■ DN22 + Encoder

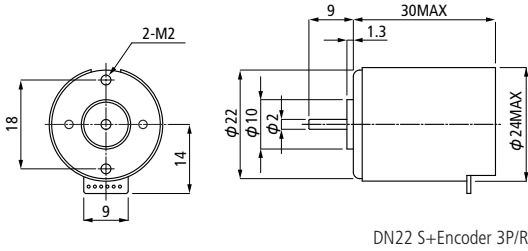

DN22 S+Encoder 3P/R

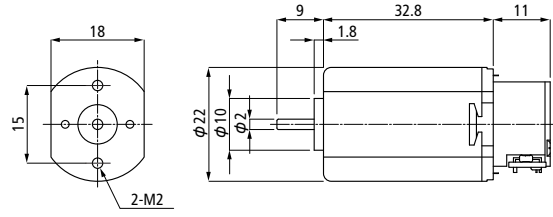

DN22 S+Encoder 62P/R

MODEL(Phases)	Input Voltage	Number of Pulses	Response Frequency	Encoder Type	Output Level	Logic Width	Duty Ratio	Output Signal Form
	V	P/R	KHz(MAX)					
DP22 (1)	5	62	20	Optical	Simulated Sine Wave	---	Simulated Sine Wave	Sine Wave
DP22 S (2)	5	3	---	Magnetic	TTL	S=90°e±45°e	35%~65%	Square Wave

DP22 : DN22 S+Encoder