

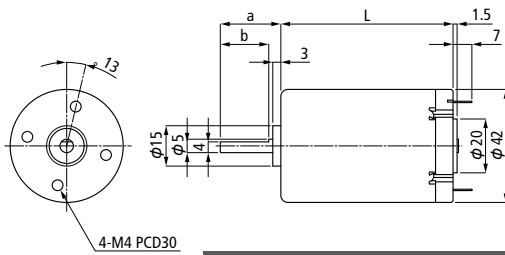


EN42 Series

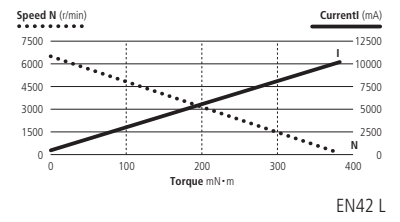

Type	L(mm)	a(mm)	b(mm)
M	64	22.5	18
L	74	24.4	12.5

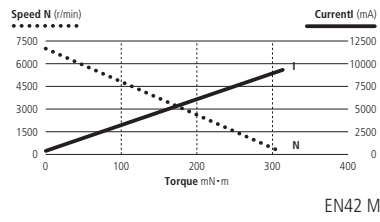

MODEL	Rated Voltage	Rated Power Output	Rated Torque	Rated Speed	Rated Current	No Load Speed	No Load Current	Starting Torque	Torque Constant	Winding Resistance	Winding Inductance	Moment of Inertia	Mechanical Time Constant	Thermal Resistance
	V	W	mN·m(gf·cm)	r/min	mA	r/min	mA	mN·m(gf·cm)	mN·m/(gf·cm/A)	Ω	mH	g·cm ²	ms	$^{\circ}\text{C/W}$
EN42 M	24	25.0	39.2 (400)	6100	1400	7000	230	314 (3200)	32.6 (332)	2.4	2.2	136.0	31	14
EN42 L	24	29.0	49.0 (500)	5600	1700	6500	250	383 (3900)	33.9 (346)	2.1	1.9	150.0	27	9